

RIMECK®
WORKWEAR MADE REAL



► **COLLECTION OF SAFETY WORKWEAR SHOES**



Bata Industrials®



RIMECK® INTRODUCES BATA INDUSTRIALS® SAFETY SHOES



Bata Industrials® is the Dutch division of the world's largest footwear company, Bata Shoe Organization, which still bears the name of its Czech founders. Bata Industrials® specialises in the production of safety footwear which protects health and contributes to the comfort of its wearers.

With automated chip technology, Bata Industrials® is able to make use of a faster, better quality and more flexible production process, including flexible restocking of inventories. The company's high-tech production combines state-of-the-art materials with advanced technology and the latest biomechanical knowledge.

The leading producer of promotional clothing, MALFINI, a.s. has enlarged the RIMECK® workwear portfolio with distribution of Bata Industrials® safety shoes.

What do the RIMECK® and Bata Industrials® names have in common?

- ▶ high-quality certified products
- ▶ EU design
- ▶ a wide range of products
- ▶ customer service
- ▶ goods availability



SAFETY

The goal of Bata Industrials® is to develop anatomically optimal footwear that meets the needs of the European market and suits the widest range of customers. The company invests into development, which is performed in its own research laboratories, followed by rigorous testing done in actual operation. Collaboration with the most important research centre for development and technology, SATRA, has enabled us to achieve a superior quality consistent with the strictest orthopaedic standards. All footwear is certified according to the European Standard EN ISO 20345:2011.

S1

► EN ISO 20345 - SAFETY SHOES WITH TOECAP RESISTANT TO IMPACTS OF 200 J AND COMPRESSION FORCES OF 15 KN.

S1 enclosed heel area, antistatic properties, energy absorption in the heel area, resistance to fuel oil

S1P

S1P identical to S1 plus anti-penetration midsole

S3

S3 identical to S1P plus water resistance and water absorption of upper material

► MARKING OF OUTSOLE SLIP RESISTANCE

SRA slip resistance on ceramic tile floor with NaLS²

SRB slip resistance on steel floor with glycerin

SRC (SRA + SRB) slip resistance on ceramic tile floor with NaLS² and on steel floor with glycerin



► ESD

ESD shoes discharge electrostatic charge and allow you to work in EPA areas (Electrostatic Protected Area) with electrostatically sensitive materials. The footwear has an electrical resistance of between 0.1 and 100 MΩ.



► ANTISTATIC SHOES

Shoes with electrical resistance greater than 100 kΩ and less than or equal to 1000 MΩ. They create the required resistance between the ground and the foot, but the shoes do not necessarily prevent electric shock.



► HEAT RESISTANT



► STEEL TOECAP



► TUNNEL SYSTEM®



► STEEL MIDSOLE



► COMPOSITE TOECAP



► MADE IN THE NETHERLANDS



► COMPOSITE MIDSOLE



► WALKLINE® 2.0

COLOURS

B0

white

B1

black

B3

gray

B5


blue

WALKLINE® 2.0

A support system for walking optimisation that eliminates health complications caused by unsuitable safety shoes. The WALKLINE® 2.0 system ensures natural movement and comfortable walking even in demanding working conditions.




Comfort when wearing shoes is affected not only by the length but also by the width of the shoe. WALKLINE® 2.0 products are available in three widths (W, XW, XXW).

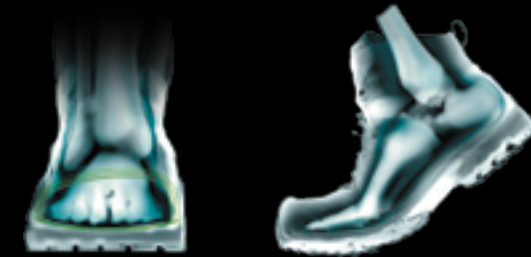

The shoe axis is adapted to the foot axis to fully accommodate biomechanical functions.

The combination of heel support, tunnel system and soft midsole absorbs shocks. This reduces pressure on joints and distributes weight to eliminate negative impacts on the arch of the foot.

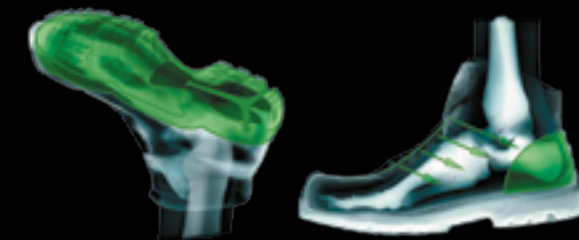

Fixing your foot inside the shoe refers to pulling your feet back towards the heel and not towards the instep. The result is a comfortable and straightforward step.

Maximum bend and flex of the sole is achieved by combining several different materials, which reduces foot fatigue and absorbs shock in each step.



The bend of the shoe is fully adapted to the foot bending zones so walking requires the least amount of energy.

Anti-slip outsoles

An important parameter in safety shoes is good adhesion to the surface. Optimal properties are achieved by carefully choosing the materials and outsole profiles.

Dual PU - outsole consisting of two layers of polyurethane of different densities. It is light, shock-absorbent and achieves excellent grip and stability.

TriTech Plus® - a durable rubber outsole that resists temperatures up to 300 °C, provides optimum shock absorption and offers excellent adhesion and stability.

QuattroTech® - a highly flexible outsole made up of four different materials to achieve perfect shock absorption and excellent adhesion and stability.



COOL COMFORT®

The Bata Cool Comfort® inner lining is a technically advanced material made up of spaced multi-layer knitted fabrics. Thanks to the internal air ventilation, this structure provides a soft, dry and fresh feeling while walking, even when worn all day at work.

► CRYPTO W ^{B01} ► CRYPTO XW ^{B02}

♂ Unisex shoes

Upper material - microfiber,
lining - Cool Comfort®


sizes: 38 - 48

width: W, XW

colour: B1

industry: construction, electrotechnical,
light, logistics, automotive

standard: EN ISO 20345:2011



- > breathable safety footwear S1P
- > protective steel toecap
- > anti-penetration composite midsole - Flex Guard®
- > technology Walkline® 2.0
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - TPU QuattroTech®
- > CI, HI - insulation against cold and heat
- > FO - resistance to fuel oil
- > A - antistatic
- > ESD - electro static discharge



► QUBIT W ^{B03} ► QUBIT XW ^{B04}

♂ Unisex shoes

Upper material - microfiber,
lining - Cool Comfort®


sizes: 38 - 48

width: W, XW

colour: B1

industry: construction, electrotechnical,
light, logistics, automotive

standard: EN ISO 20345:2011



- > breathable safety footwear S1P
- > protective steel toecap
- > anti-penetration composite midsole - Flex Guard®
- > technology Walkline® 2.0
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - TPU QuattroTech®
- > CI, HI - insulation against cold and heat
- > FO - resistance to fuel oil
- > A - antistatic
- > ESD - electro static discharge



► RADAR W ^{B05} ► RADAR XW ^{B06}

♂ Unisex shoes

Upper material - water resistant full grain
leather, lining - Cool Comfort®

sizes: 38 - 48

width: W, XW

colour: B1

industry: agriculture, heavy, construction,
chemical, electrotechnical

standard: EN ISO 20345:2011



- > safety footwear S3
- > protective steel toecap
- > anti-penetration steel midsole
- > technology Walkline® 2.0
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - TPU QuattroTech®
- > CI, HI - insulation against cold and heat
- > FO - resistance to fuel oil
- > A - antistatic
- > ESD - electro static discharge



► VECTOR W ^{B07} ► VECTOR XW ^{B08}

♂ Ankle boot unisex

Upper material - water resistant full grain
leather, lining - Cool Comfort®

sizes: 38 - 48

width: W, XW

colour: B1

industry: agriculture, heavy, construction,
chemical, electrotechnical

standard: EN ISO 20345:2011



- > safety footwear S3
- > protective steel toecap
- > anti-penetration steel midsole
- > technology Walkline® 2.0
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - TPU QuattroTech®
- > CI, HI - insulation against cold and heat
- > FO - resistance to fuel oil
- > A - antistatic
- > ESD - electro static discharge



▶ **ACT 151 W B09**

♀ Sandals unisex

Upper material - microfiber,
lining - Cool Comfort®

sizes: 35 - 49

width: W

colour: B1

industry: electrotechnical, light,
logistics, automotive

standard: EN ISO 20345:2011



- > breathable safety footwear S1P
- > protective steel toecap
- > anti-penetration composite midsole - Flex Guard®
- > technology Walkline® 2.0
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - dual density PU
- > Cl, HI - insulation against cold and heat
- > FO - resistance to fuel oil
- > A - antistatic



ODOR CONTROL®

This patented antimicrobial system effectively combats footwear odor. This 100% organic method is based on a peppermint extract that naturally eliminates 99.9 % of bacteria. It works up to 240 °C.

▶ **ACT 156 W B10** ▶ **ACT 156 XW B11**

♀ Unisex shoes

Upper material - water resistant microfiber,
lining - Cool Comfort®


sizes: W 35 - 48, XW 38 - 48

width: W, XW

colour: B0

industry: agriculture, chemical, electro-
technical, food, pharmaceutical,
light, logistics, automotive

standard: EN ISO 20345:2011



- > antibacterial safety footwear S3
- > protective steel toecap
- > anti-penetration composite midsole - Flex Guard®
- > technology Walkline® 2.0
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - dual density PU
- > Cl, HI - insulation against cold and heat
- > FO - resistance to fuel oil
- > A - antistatic
- > ESD - electro static discharge



▶ **ACT 157 W B12** ▶ **ACT 157 XW B13**

♀ Unisex shoes

Upper material - water resistant microfiber,
lining - Cool Comfort®


sizes: W 35 - 48, XW 38 - 48

width: W, XW

colour: B0

industry: agriculture, chemical, electro-
technical, food, pharmaceutical,
light, logistics, automotive

standard: EN ISO 20345:2011



- > antibacterial safety footwear S3
- > protective steel toecap
- > anti-penetration composite midsole - Flex Guard®
- > technology Walkline® 2.0
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - dual density PU
- > Cl, HI - insulation against cold and heat
- > FO - resistance to fuel oil
- > A - antistatic
- > ESD - electro static discharge



▶ **PWR 309 W B14** ▶ **PWR 309 XW B15** ▶ **PWR 309 XXW B16**

♀ Unisex shoes

Upper material - water resistant full grain
leather, lining - Cool Comfort®

sizes: W, XW 35 - 48, XXW 40 - 46

width: W, XW, XXW

colour: B1

industry: agriculture, heavy, construction,
chemical, electrotechnical, food,
automobile

standard: EN ISO 20345:2011



- > safety footwear S3
- > protective steel toecap
- > anti-penetration steel midsole
- > technology Walkline® 2.0
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - PU/rubber TriTech Plus®
- > Cl, HI - insulation against cold and heat
- > HRO - resistance to hot contact until 300 °C
- > FO - resistance to fuel oil
- > A - antistatic



▶ **PWR 312 W B17** ▶ **PWR 312 XW B18** ▶ **PWR 312 XXW B19**

♀ Ankle boot unisex

Upper material - water resistant full grain
leather, lining - Cool Comfort®

sizes: W, XW 35 - 48, XXW 40 - 46

width: W, XW, XXW

colour: B1

industry: agriculture, heavy, construction,
chemical, electrotechnical, food,
automobile

standard: EN ISO 20345:2011



- > safety footwear S3
- > protective steel toecap
- > anti-penetration steel midsole
- > technology Walkline® 2.0
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - PU/rubber TriTech Plus®
- > Cl, HI - insulation against cold and heat
- > HRO - resistance to hot contact until 300 °C
- > FO - resistance to fuel oil
- > A - antistatic





METAL FREE

Suitable footwear for workplaces where workers routinely walk through metal detectors.

► BRIGHT 021 B20

♀ Unisex shoes

Upper material - microfiber,
lining - mesh

sizes: 34 - 47

width: W

colour: B5

industry: food, light, logistics, automotive

standard: EN ISO 20345:2011

- > breathable safety footwear S1P
- > protective composite toecap
- > anti-penetration composite midsole - Flex Guard®
- > E - energy absorption in the heel area
- > SRC - slip resistant
- > sole - EVA/rubber Vibram®
- > FO - resistance to fuel oil
- > A - antistatic
- > full metal free



► BRIGHT 031 W B21

♀ Unisex shoes

Upper material - microfiber,
lining - mesh

sizes: 34 - 47

width: W

colour: B1

industry: food, light, logistics, automotive

standard: EN ISO 20345:2011

- > breathable safety footwear S1P
- > protective composite toecap
- > anti-penetration composite midsole - Flex Guard®
- > E - energy absorption in the heel area
- > SRC - slip resistant
- > sole - EVA/rubber Vibram®
- > FO - resistance to fuel oil
- > A - antistatic
- > full metal free



VIBRAM®

Italian outsoles with high abrasion resistance renowned for their excellent adhesion to the widest range of surfaces. These outsoles were first used on climbing boots, replacing the usual leather outsoles that featured steel pins.



TUNNEL SYSTEM®

This system ensures energy absorption and stability in the heel area, absorbs walking impacts, protects your joints and keeps you in an upright position. This outsole features a distinctive and sharp curvature called a tunnel which distributes the pressure over a larger surface. The weight of the user has no impact on the function of the shoe.

► RIGA XW ^{B22}

♂ Sandals unisex

Upper material - suede,
lining - mesh

sizes: 35 - 48

width: XW

colour: B3

industry: food, light, logistics, automotive

standard: EN ISO 20345:2011

- > breathable safety footwear S1
- > protective steel toecap
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRA - slip resistant
- sole - dual density PU
- > FO - resistance to fuel oil
- > A - antistatic



► TIGUA W ^{B23}

♀ Unisex shoes

Upper material - nubuck leather,
lining - Cool Comfort®

sizes: 37 - 48


width: XW

colour: B3

industry: electrotechnical, food, light, logis-
tics, automotive

standard: EN ISO 20345:2011

- > breathable safety footwear S1
- > protective steel toecap
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRA - slip resistant
- sole - dual density PU
- > CI, HI - insulation against cold and heat
- > FO - resistance to fuel oil
- > A - antistatic
- > ESD - electro static discharge



► NORFOLK XW ^{B25}

♀ Unisex shoes

Upper material - water resistant full grain
leather, lining - mesh

sizes: 35 - 48


width: XW

colour: B1

industry: agriculture, heavy, construction,
chemical, food

standard: EN ISO 20345:2011

- > safety footwear S3
- > protective steel toecap
- > anti-penetration steel midsole
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRA - slip resistant
- sole - dual density PU
- > FO - resistance to fuel oil
- > A - antistatic



► STOCKHOLM XW ^{B26}

♀ Ankle boot unisex

Upper material - water resistant full grain
leather, lining - mesh

sizes: 37 - 48

width: XW

colour: B1

industry: agriculture, heavy, construction,
chemical, food

standard: EN ISO 20345:2011

- > safety footwear S3
- > protective steel toecap
- > anti-penetration steel midsole
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRA - slip resistant
- sole - dual density PU
- > FO - resistance to fuel oil
- > A - antistatic





► BICKZ 736 W ^{B27}

♀ Unisex shoes

Upper material - nubuck leather,
lining - Bickz Cool System®

sizes: 36 - 48

width: W

colour: B1

industry: construction, electrical, light,
logistics, automotive

standard: EN ISO 20345:2011



- > safety footwear S1P
- > protective composite toecap
- > anti-penetration composite midsole - Flex Guard®
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - EVA/rubber
- > HRO - resistance to hot contact until 300 °C
- > FO - resistance to fuel oil
- > A - antistatic
- > ESD - electro static discharge
- > full metal free



► BICKZ 733 W ^{B28}

♀ Ankle boot unisex

Upper material - water resistant nubuck leather, lining - Bickz Cool System®

sizes: 36 - 48

width: W

colour: B1

industry: agriculture, construction,
electrotechnics, automobile

standard: EN ISO 20345:2011



- > safety footwear S3
- > protective composite toecap
- > anti-penetration composite midsole - Flex Guard®
- > Tunnel system®
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - EVA/rubber
- > HRO - resistance to hot contact until 300 °C
- > FO - resistance to fuel oil
- > A - antistatic
- > ESD - electro static discharge
- > full metal free



► BICKZ 203 W ^{B29}

♀ Unisex shoes

Upper material - water resistant full grain leather, lining - Bickz Cool System®


sizes: 38 - 48

width: W

colour: B1

industry: agriculture, heavy,
construction, automotive

standard: EN ISO 20345:2011



- > safety footwear S3
- > protective composite toecap
- > anti-penetration composite midsole - Flex Guard®
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - EVA/rubber
- > HRO - resistance to hot contact until 300 °C
- > FO - resistance to fuel oil
- > A - antistatic



► BICKZ 204 W ^{B30}

♀ Ankle boot unisex

Upper material - water resistant full grain leather, lining - Bickz Cool System®

sizes: 38 - 48

width: W

colour: B1

industry: agriculture, heavy,
construction, automotive

standard: EN ISO 20345:2011




- > safety footwear S3
- > protective composite toecap
- > anti-penetration composite midsole - Flex Guard®
- > E - energy absorption in the heel area
- > SRC - slip resistant sole - EVA/rubber
- > HRO - resistance to hot contact until 300 °C
- > FO - resistance to fuel oil
- > A - antistatic



WIDTH (mm)			
♀	W	XW	XXW
34	86		
35	<88	>88	
36	<90	>90	
37	<92	>92	
38	<94	>94	
39	<96	>96	
40	<98	98 – 100	>100
41	<100	100 – 102	>102
42	<102	102 – 104	>104
43	<104	104 – 106	>106
44	<106	106 – 108	>108
45	<108	108 – 110	>110
46	<110	110 – 112	>112
47	<112	>112	
48	<114	>114	
49	<116	>116	

DIMENSION TABLE																
Mondopoint (mm)	210	217	225	232	240	247	255	262	270	277	285	292	300	307	315	322
EU	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49
UK	1	2	3	4	5	6	6,5	7	8	9	9,5	10	11	12	13	14

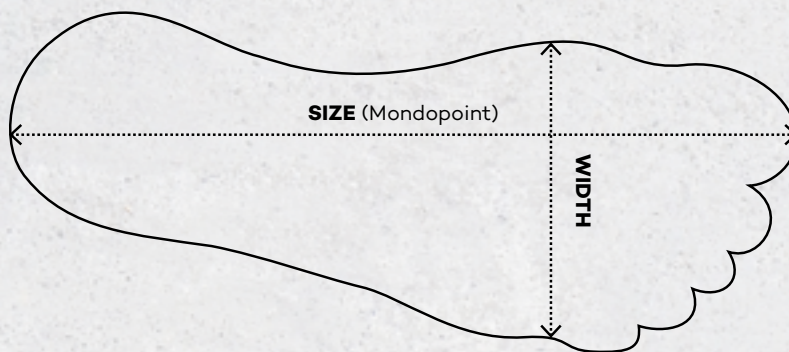

Bata Industrials®

Thanks to the wide range of products, widths and sizes, Bata Industrials® safety shoes are used in many industries.

RECOMMENDED INDUSTRY												
			agriculture	heavy	construction	chemical	electrotechnical	food	pharmaceutical	light	logistics	automotive
B01	CRYPTO W				✓		✓			✓	✓	✓
B02	CRYPTO XW											
B03	QUBIT W				✓		✓			✓	✓	✓
B04	QUBIT XW											
B05	RADAR W		✓	✓	✓	✓	✓					
B06	RADAR XW											
B07	VECTOR W		✓	✓	✓	✓	✓					
B08	VECTOR XW											
B09	ACT 151 W						✓			✓	✓	✓
B10	ACT 156 W		✓			✓	✓	✓	✓	✓	✓	✓
B11	ACT 156 XW											
B12	ACT 157 W		✓			✓	✓	✓	✓	✓	✓	✓
B13	ACT 157 XW											
B14	PWR 309 W		✓	✓	✓	✓	✓	✓				✓
B15	PWR 309 XW											
B16	PWR 309 XXW											
B17	PWR 312 W		✓	✓	✓	✓	✓	✓				✓
B18	PWR 312 XW											
B19	PWR 312 XXW											
B20	BRIGHT 021 W							✓		✓	✓	✓
B21	BRIGHT 031 W							✓		✓	✓	✓
B22	RIGA XW							✓		✓	✓	✓
B23	TIGUA W						✓	✓		✓	✓	✓
B24	TIGUA XW											
B25	NORFOLK XW		✓	✓	✓	✓		✓				
B26	STOCKHOLM XW		✓	✓	✓	✓		✓				
B27	BICKZ 736 W				✓		✓			✓	✓	✓
B28	BICKZ 733 W		✓		✓		✓					✓
B29	BICKZ 203 W		✓	✓	✓							✓
B30	BICKZ 204 W		✓	✓	✓							✓